

OWNER'S MANUAL

MCCORMICK

No. 1 PLATFORM CARRIER

INTRODUCTION

The No. 1 Platform Carrier is designed for use on Farmall Cub, 100, 130, 140, International Cub Lo-Boy, 130 and 140 Tractors equipped with Hydraulic Touch Control and Fast-Hitch. A single notched coupling prong permits quick and easy attaching and detaching. Loads may be picked up, carried and either removed from the platform or left on the platform which is lowered to the ground and detached. The carrier is intended for transporting small loads such as barrels, sacks of feed, fence posts and countless other items.

The recommended maximum load is 350 pounds for the Farmall Cub, 175 pounds for the International Cub Lo-Boy and 550 pounds for the Farmall and International 100, 130 and 140 Tractors.

Five fir boards treated with wood preservative are furnished drilled to fit when ordered. Directions are furnished below for those who wish to supply their own boards. Two sockets will be found at the rear edge of the platform permitting the use of stakes to retain the load.


PREPARING NEW BOARDS

Obtain three 2 x 8" planks 48" long and two 1 x 6" boards 48" long. No difficulty will be experienced in fitting standard dimension milled lumber. Slot holes in the plank support angles are provided to assist in fitting the planks. Use the two 1 x 6" boards to make the upright front and the three 2 x 8" planks for the floor.

INTERNATIONAL HARVESTER COMPANY


180 North Michigan Ave.

Chicago 1, Illinois, U.S.A.

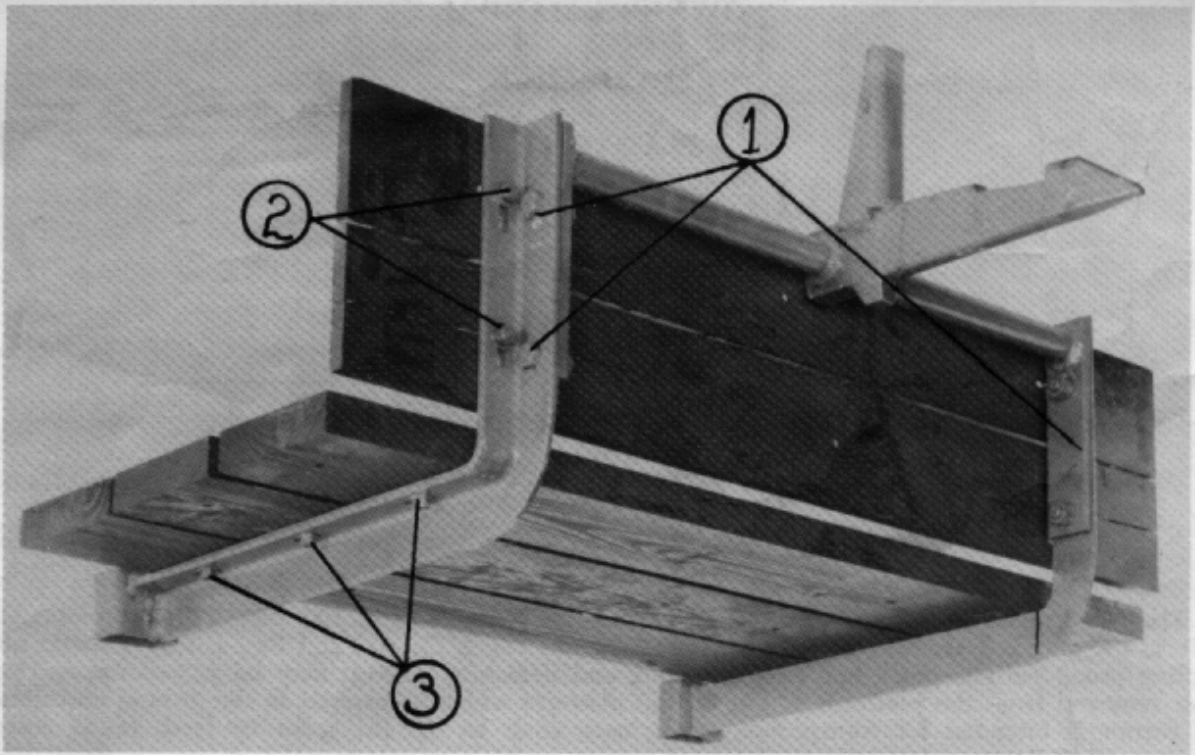

Illust. 1

1. Bolt the frame angles to the torque bar.
2. Bolt the two 1 x 6" boards to the frame angles forming the vertical front.
3. Bolt the three 2 x 8" planks to the frame angles forming the floor.
4. Attach the Platform Carrier to the tractor as shown in **Illust. 2**.

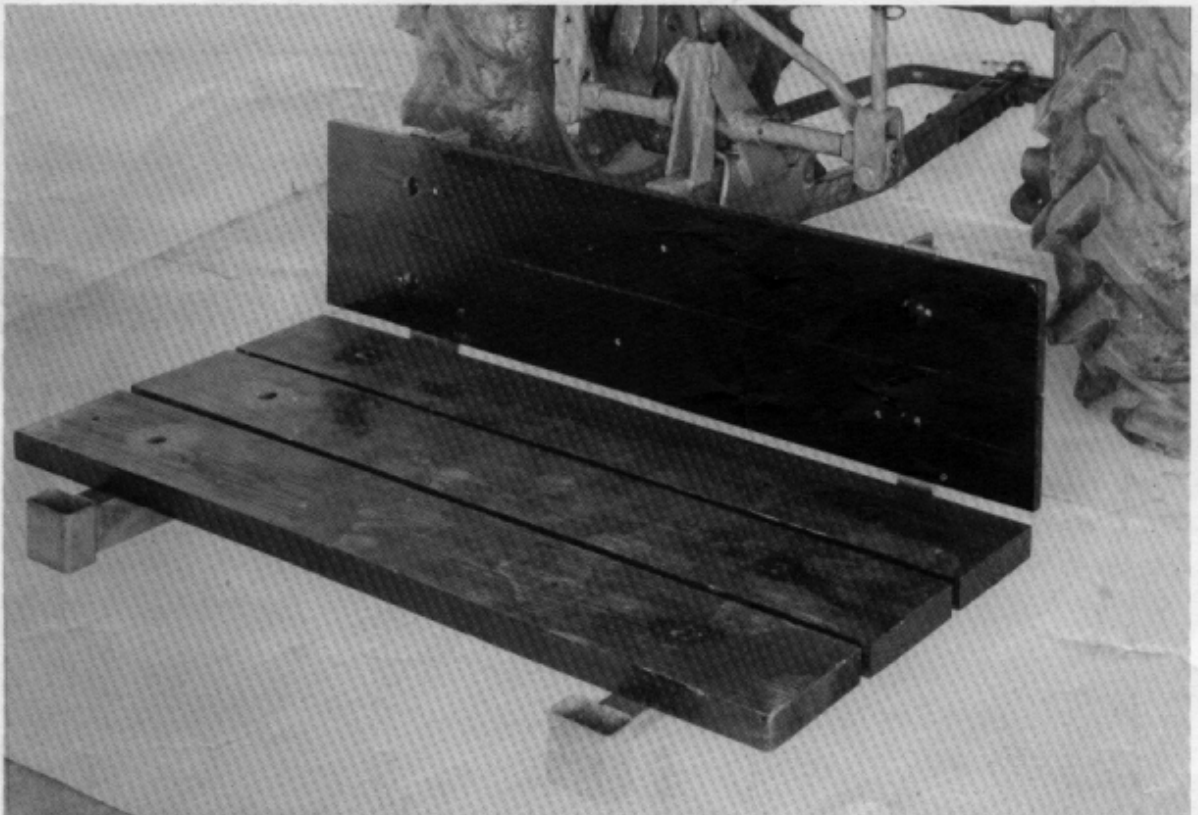

Illust. 2